



RIPPLEPAK

(division of Uthane Research LTD)

3115-14th ave., #6

Markham On L3R0H1

Ph: 905-940-2356

About the product:

Hybrid Ceramic Fiber/PET used in lightweight units for thermal, and sound insulation

Fire Barrier Insulation


R-Value:	R7 per inch
Thickness:	1", 3"- 5"
Density:	4lbs/ cu ft.
Fire Rating:	1.5 hrs-2hrs at 1000°C

- Thin, light weight and easy to install
- Flexible for wrapping around corners & obstacles
- Easy to cut, fabricate and wrap around ducts, pipe, cable through band strap fixing
- Present good acoustic and thermal insulation properties
- Used between wood & metal studs

Fire Barrier

Thickness:	1/4", 1"
Density:	10/ cu ft.
Fire Rating:	1/4", 20mins. at 400°C
	1" 1 hr. at 600°C

- Easy to cover Polyurethane Foam, Styrofoam, or Cellulose Fibre

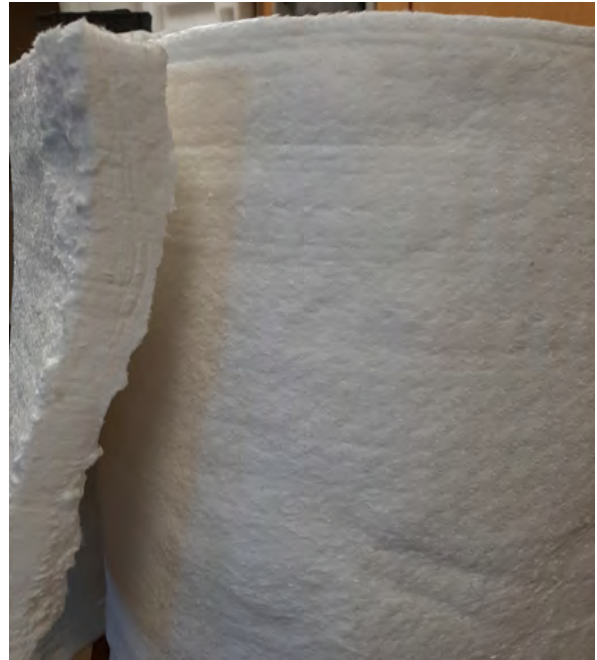

Fire Barrier: 2"



Fire Barrier: 1/2"



Fire Barrier Roll